

GfG GMA 313 and Canary Remote CO2 Storage Safety Alarm System

Applications for CO2 Monitor

- Installed only in non-naturally ventilated areas
- Installed next to potential sources, such as Coolrooms, Cellar spaces and Post Mix areas
- Mounting on the wall 300 to 600mm from a solid floor
- Must be hard wired (D/B Board or back of a GPO)
- Prefer Circuit Breaker in the D/B Board
- Option: Safety Shield—Mechanical protection from kegs



Model: GfG GMA313


Applications for CRAM, DRAM and Repeater units

- Installed in an easy to see point and with easy access
- Typically 1500mm from the floor
- Every entry must be covered with an Alarm Unit
- All Sensors come with a locally generated/issued calibration report
- All Sensors come with a laminated set of operating procedure to be mounted next to the Alarm Units



Model: Canary CRAM

Sketches and Examples

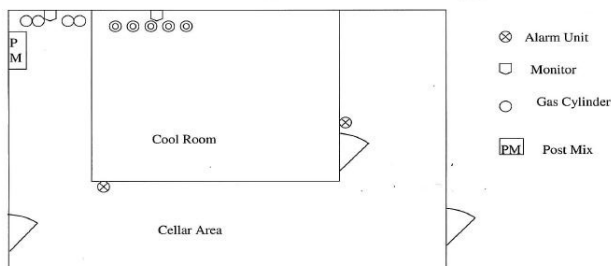

Requirements: 2 Monitors and 2 Alarm Units



Model: Canary DRAM

Distributed by:

The Canary Company Pty Limited
 Suite 1, 163 Burns Bay Road (PO Box 500)
 Lane Cove, NSW 2066, Australia
 Phone: +61 (0)2 9418 6666 Toll Free: 1800 668 166
www.canaryco.com.au